2026 / EN

# Product catalogue

Extinguishers, agents and accessories




## FX51 / FX73 / Motorsport

### Explore the range online

Digital product illustrations. Finishes and proportions may vary.

# Contents

## Portable extinguishers


Red steel · 2 L 11
Red steel · 6 L 12
Red steel · 9 L 13
Stainless steel · 2 L 14
Stainless steel · 6 L 15
Stainless steel · 9 L 16
Compact stainless · 500 ml 17
Black fire extinguisher 18


## Motorsport


Motorsport · 1.4 L 19
Motorsport · 1.75 L 20
Motorsport · 2 L 21
Motorsport · 2.4 L 22
Motorsport · 6 L 23
Motorsport · 9 L 24


## Accessories


Transport bracket · 2 L 25
Transport bracket · 6 L 26
Transport bracket · 9 L 27
Modular stand 28
Photoluminescent sign 29
Standard sign 30



At home and on the road / 03
In the workplace / 04
FX51 / 08
FX73 / 09
Destination labels / 31
Become a partner / 32

Application guide

# At home and on the road




Compact stainless · 500 ml

## Apartment kitchen · pan and hood




Compact stainless · 500 ml

### Campervan · extinguisher within reach




Stainless steel · 6 L

### Garden · wood fire

Digital product illustrations. Finishes and proportions may vary.

Application guide

# In the workplace




Stainless steel · 2 L

## Professional kitchen



Red steel · 6 L

### Public transport equipment · metros, buses and trams




Motorsport · 2 L

### Sports car · 12 V battery

Digital product illustrations. Finishes and proportions may vary.

# Portable extinguishers

## Red steel




## Stainless steel




## Compare the models

### Red steel

| Capacity | Height mm | Cylinder Ø mm | Full weight kg | A/B/F |
|---|---|---|---|---|
| 2 L | 415 | 110 | 4.09 | 13A / 34B / 25F |
| 6 L | 520 | 162 | 10.67 | 34A / 113B / 75F |
| 9 L | 595 | 184 | 15.13 | 55A / 183B / 75F |

### Stainless steel

| Capacity | Height mm | Cylinder Ø mm | Full weight kg | A/B/F |
|---|---|---|---|---|
| 2 L | 430 | 110 | 3.52 | 13A / 34B / 25F |
| 6 L | 530 | 162 | 9.5 | 34A / 113B / 75F |
| 9 L | 635 | 180 | 14.28 | 55A / 183B / 75F |

| | | | | | |
|---|---|---|---|---|---|
| **13A** | Wood, paper | **34B** | Flammable liquids | **25F** | Cooking oils and fats |

The number before the letter gives the rating in a standardised fire test. Check the selected model's label for its fire ratings and classes.

**View fire tests**

# Compact formats and black finish







## Compact stainless

**500 ml**

295 × Ø64 mm · 1.1 kg

3A / 13B / 5F

View product details




## Black fire extinguisher

2 L proposed

View product details

The compact stainless model offers a small footprint. The black finish is available for enquiry, with model and capacity to be confirmed.

# Motorsport







1.4 L | 1.75 L | 2 L | 2.4 L | 6 L | 9 L

| Capacity | Height mm | Cylinder Ø mm | Full weight kg |
|---|---|---|---|
| 1.4 L | 325 | 110 | 3.06 |
| 1.75 L | 375 | 110 | 3.6 |
| 2 L | 395 | 110 | 4.04 |
| 2.4 L | 355 | 140 | 4.53 |
| 6 L | 512 | 162 | 10.63 |
| 9 L | 596 | 184 | 15.28 |

Check the selected model's label for its fire ratings and classes.

# FX51

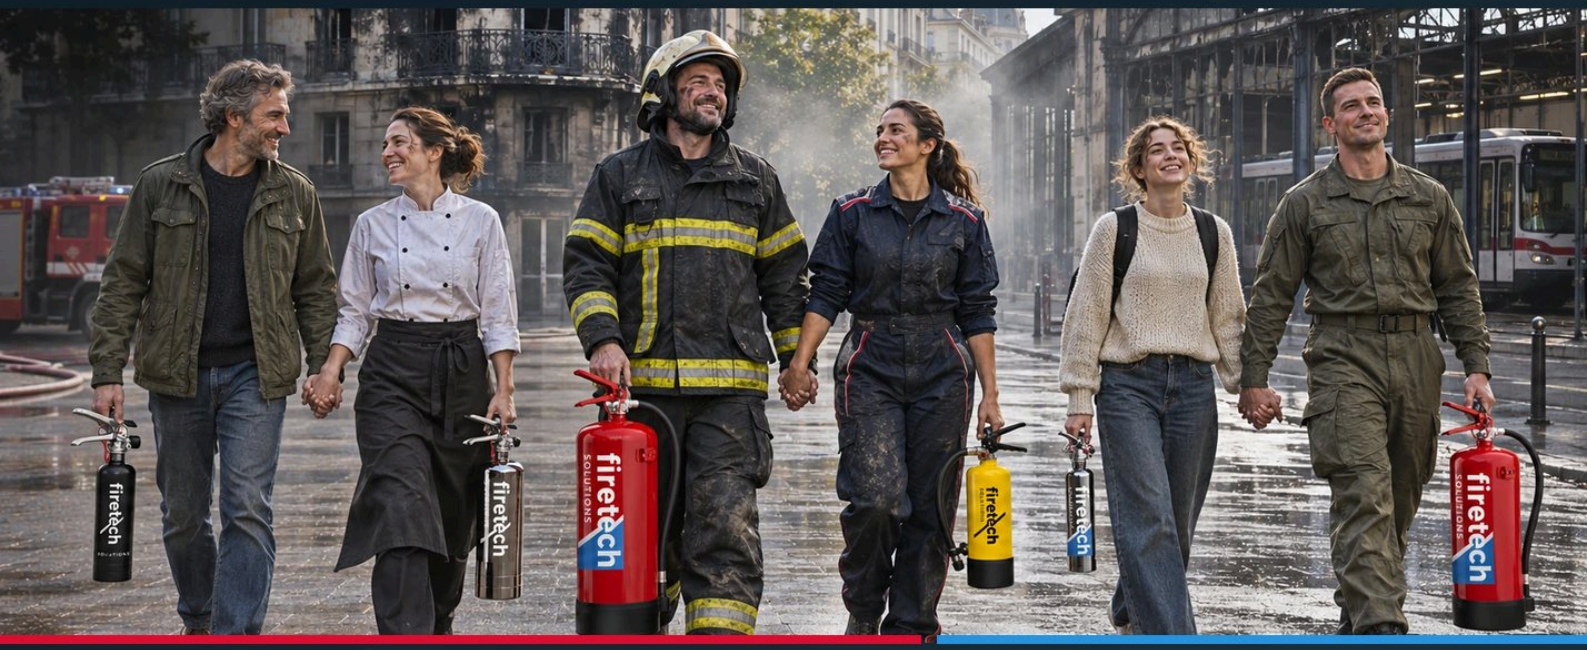


## Water-based extinguishing agent

The agent inside our portable All Fires extinguishers. Check each model's label for its fire ratings.



| Red steel | Stainless steel | Compact stainless | Motorsport |
|---|---|---|---|
| 2 / 6 / 9 L | 2 / 6 / 9 L | 500 ml | 1.4 L – 9 L |

## Containers · 1.4–1,000 L

**View product details**

**Request a quotation**

# FX73



## Large-scale firefighting

A professional concentrate for wildfires and large structural fires, with formulations for ground or aerial equipment.



**Large Scale**
Ground and aerial application

**Land**
Ground application

**Air**
Aerial application

## Bulk concentrate · from 1,000 L

**View product details**

**Request a quotation**

# Accessories



## Transport bracket · 2 L



## Transport bracket · 6 L



## Transport bracket · 9 L



## Modular stand




## Photoluminescent sign




## Standard sign

Digital product illustrations. Finishes and proportions may vary.

Technical specifications

# Red steel · 2 L




Wall hook included. Choose the cylinder finish and capacity before selecting its mounting accessories.

| | |
|---|---|
| Product reference<br>809-765-347-846 | Capacity<br>2 L |
| Overall Product Height<br>415 mm | Cylinder Height<br>313 mm |
| Cylinder Diameter<br>110 mm | Cylinder Material<br>Steel |
| Pressurising Gas<br>Nitrogen | Extinguishing Agent<br>FX51 |
| Test Pressure<br>30 bar | Working Pressure<br>12 bar |
| Weight (Full)<br>4.09 kg | Weight (Empty)<br>1.75 kg |
| Spray Range<br>1–3 m | Discharge Time<br>20–25 s |
| Temperature Range<br>-15 °C/+60 °C | Warranty<br>5 years |
| A / B / F<br>13A / 34B / 25F | CE<br>CE 0036 |
| Testing standard<br>EN 3-7, EN 3-8 | MED<br>BSI/MED/3.2/796133 |

View product details | Home customer | Business

Technical specifications

# Red steel · 6 L




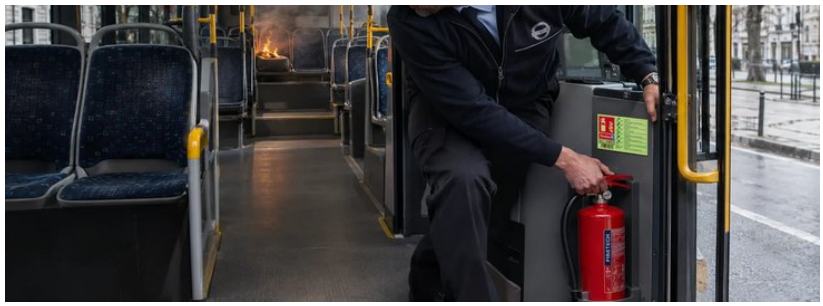

Wall hook included. Choose the cylinder finish and capacity before selecting its mounting accessories.

| | |
|---|---|
| Product reference<br>809-765-347-876 | Capacity<br>6 L |
| Overall Product Height<br>520 mm | Cylinder Height<br>430 mm |
| Cylinder Diameter<br>162 mm | Cylinder Material<br>Steel |
| Pressurising Gas<br>Nitrogen | Extinguishing Agent<br>FX51 |
| Test Pressure<br>30 bar | Working Pressure<br>12 bar |
| Weight (Full)<br>10.67 kg | Weight (Empty)<br>3.65 kg |
| Spray Range<br>1–4 m | Discharge Time<br>25–35 s |
| Temperature Range<br>-15 °C/+60 °C | Warranty<br>5 years |
| A / B / F<br>34A / 113B / 75F | CE<br>CE 0036 |
| Testing standard<br>EN 3-7, EN 3-8 | MED<br>BSI/MED/3.2/796133 |

View product details | Home customer | Business

Technical specifications

# Red steel · 9 L






Wall hook included. Choose the cylinder finish and capacity before selecting its mounting accessories.

| | |
|---|---|
| Product reference<br>809-765-347-906 | Capacity<br>9 L |
| Overall Product Height<br>595 mm | Cylinder Height<br>490 mm |
| Cylinder Diameter<br>184 mm | Cylinder Material<br>Steel |
| Pressurising Gas<br>Nitrogen | Extinguishing Agent<br>FX51 |
| Test Pressure<br>30 bar | Working Pressure<br>12 bar |
| Weight (Full)<br>15.13 kg | Weight (Empty)<br>4.6 kg |
| Spray Range<br>1–4 m | Discharge Time<br>45–55 s |
| Temperature Range<br>-15 °C/+60 °C | Warranty<br>5 Years |
| A / B / F<br>55A / 183B / 75F | CE<br>CE 0036 |
| Testing standard<br>EN 3-7, EN 3-8 | MED<br>BSI/MED/3.2/796133 |

View product details | Home customer | Business

Technical specifications

# Stainless steel · 2 L







**Wall hook included. Choose the cylinder finish and capacity before selecting its mounting accessories.**

| | |
|---|---|
| Product reference<br>809-765-347-066 | Capacity<br>2 L |
| Overall Product Height<br>430 mm | Cylinder Height<br>335 mm |
| Cylinder Diameter<br>110 mm | Cylinder Material<br>Stainless Steel |
| Pressurising Gas<br>Nitrogen | Extinguishing Agent<br>FX51 |
| Test Pressure<br>30 bar | Working Pressure<br>12 bar |
| Weight (Full)<br>3.52 kg | Weight (Empty)<br>1.18 kg |
| Spray Range<br>1–3 m | Discharge Time<br>15–20 s |
| Temperature Range<br>-15 °C/+60 °C | Warranty<br>5 Years |
| A / B / F<br>13A / 34B / 25F | CE<br>CE 0036 |

View product details | Home customer | Business

Technical specifications

# Stainless steel · 6 L






Wall hook included. Choose the cylinder finish and capacity before selecting its mounting accessories.

| | |
|---|---|
| Product reference<br>809-765-347-096 | Capacity<br>6 L |
| Overall Product Height<br>530 mm | Cylinder Height<br>450 mm |
| Cylinder Diameter<br>162 mm | Cylinder Material<br>Stainless Steel |
| Pressurising Gas<br>Nitrogen | Test Pressure<br>30 bar |
| Working Pressure<br>12 bar | Extinguishing Agent<br>FX51 |
| Weight (Full)<br>9.50 kg | Weight (Empty)<br>2.48 kg |
| Spray Range<br>1–4 m | Discharge Time<br>25–30 s |
| Temperature Range<br>-15 °C/+60 °C | Warranty<br>5 Years |
| A / B / F<br>34A / 113B / 75F | CE<br>CE 0036 |

View product details | Home customer | Business

Technical specifications

# Stainless steel · 9 L




Wall hook included. Choose the cylinder finish and capacity before selecting its mounting accessories.

| | |
|---|---|
| Product reference<br>809-765-347-126 | Capacity<br>9 L |
| Overall Product Height<br>635 mm | Cylinder Height<br>545 mm |
| Cylinder Diameter<br>180 mm | Cylinder Material<br>Stainless Steel |
| Pressurising Gas<br>Nitrogen | Extinguishing Agent<br>FX51 |
| Test Pressure<br>30 bar | Working Pressure<br>12 bar |
| Weight (Full)<br>14.28 kg | Weight (Empty)<br>3.75 kg |
| Spray Range<br>1–4 m | Discharge Time<br>35–45 s |
| Temperature Range<br>-15 °C/+60 °C | Warranty<br>5 years |
| A / B / F<br>55A / 183B / 75F | CE<br>CE 0036 |

View product details | Home customer | Business

Technical specifications

# Compact stainless · 500 ml







Compact stainless steel aerosol with transport bracket included.

| | |
|---|---|
| Product reference<br>809-765-347-816 | Capacity<br>500 ml |
| Overall Product Height<br>295 mm | Cylinder Height<br>235 mm |
| Cylinder Diameter<br>64 mm | Cylinder Material<br>Stainless Steel |
| Pressurising Gas<br>Nitrogen | Extinguishing Agent<br>FX51 |
| Test Pressure<br>27 bar | Working Pressure<br>10–12 bar |
| Weight (Full)<br>1.1 kg | Weight (Empty)<br>0.52 kg |
| Spray Range<br>1–2 m | Discharge Time<br>8–12 s |
| Temperature Range<br>-15 °C/+60 °C | Warranty<br>3 Years |
| A / B / F<br>3A / 13B / 5F | |

View product details | Home customer | Business

Technical specifications

# Black fire extinguisher

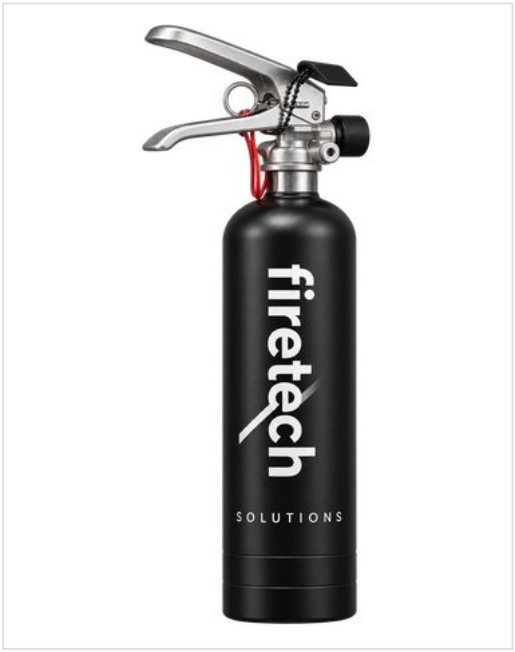





2 L proposed

## Technical data to confirm

Manufacturer reference, capacity, dimensions, weight, extinguishing agent, pressures, spray range, discharge time, temperature range, warranty, fire ratings and certificates.

Contact Firetech Solutions to confirm available capacities and fire classes.

View product details

Business

Technical specifications

# Motorsport · 1.4 L




To check a homologation, look up the model number in the FIA technical list.

| | |
|---|---|
| FIA Homologation Number | Capacity |
| ME.001.24 | 1.4 L |
| Overall Product Height | Cylinder Height |
| 325 ± 5 mm | 245 ± 2 mm |
| Cylinder Diameter | Cylinder Material |
| 110 ± 1 mm | Steel |
| Pressurising Gas | Extinguishing Agent |
| Nitrogen | FX51 |
| Test Pressure | Working Pressure |
| 36 bar | 12 bar |
| Weight (Full) | Weight (Empty) |
| 3.06 kg | 1.42 kg |
| Spray Range | Discharge Time |
| 2–3 m | 15–20 s |
| Temperature Range | Warranty |
| -15 °C/+80 °C | 6 years – refilled every 2 years |
| Testing standard | CE |
| FIA 8865-2015 | CE 0036 |

View product details | Home customer | Business

Technical specifications

# Motorsport · 1.75 L




To check a homologation, look up the model number in the FIA technical list.

| | |
|---|---|
| FIA Homologation Number | Capacity |
| ME.002.24 | 1.75 L |
| Overall Product Height | Cylinder Height |
| 375 ± 5 mm | 288 ± 2 mm |
| Cylinder Diameter | Cylinder Material |
| 110 ± 1 mm | Steel |
| Pressurising Gas | Extinguishing Agent |
| Nitrogen | FX51 |
| Test Pressure | Working Pressure |
| 36 bar | 12 bar |
| Weight (Full) | Weight (Empty) |
| 3.6 kg | 1.55 kg |
| Spray Range | Discharge Time |
| 2–3 m | 18–23 s |
| Temperature Range | Warranty |
| -15 °C/+80 °C | 6 years – refilled every 2 years |
| Testing standard | CE |
| FIA 8865-2015 | CE 0036 |

View product details | Home customer | Business

Technical specifications

# Motorsport · 2 L







**To check a homologation, look up the model number in the FIA technical list.**

| | |
|---|---|
| FIA Homologation Number<br>ME.003.24 | Capacity<br>2 L |
| Overall Product Height<br>395 ± 5 mm | Cylinder Height<br>313 ± 2 mm |
| Cylinder Diameter<br>110 ± 1 mm | Cylinder Material<br>Steel |
| Pressurising Gas<br>Nitrogen | Extinguishing Agent<br>FX51 |
| Test Pressure<br>36 bar | Working Pressure<br>12 bar |
| Weight (Full)<br>4.04 kg | Weight (Empty)<br>1.7 kg |
| Spray Range<br>2–3 m | Discharge Time<br>20–25 s |
| Temperature Range<br>-15 °C/+80 °C | Warranty<br>6 years – refilled every 2 years |
| Testing standard<br>FIA 8865-2015 | CE<br>CE 0036 |

View product details | Home customer | Business

Technical specifications

# Motorsport · 2.4 L




To check a homologation, look up the model number in the FIA technical list.

| | |
|---|---|
| FIA Homologation Number<br>ME.004.24 | Capacity<br>2.4 L |
| Overall Product Height<br>355 ± 5 mm | Cylinder Height<br>255 ± 2 mm |
| Cylinder Diameter<br>140 ± 1 mm | Cylinder Material<br>Steel |
| Pressurising Gas<br>Nitrogen | Extinguishing Agent<br>FX51 |
| Test Pressure<br>36 bar | Working Pressure<br>12 bar |
| Weight (Full)<br>4.53 kg | Weight (Empty)<br>1.72 kg |
| Spray Range<br>2–3 m | Discharge Time<br>23–28 s |
| Temperature Range<br>-15 °C/+80 °C | Warranty<br>6 years – refilled every 2 years |
| Testing standard<br>FIA 8865-2015 | CE<br>CE 0036 |

View product details | Home customer | Business

Technical specifications

# Motorsport · 6 L




To check a homologation, look up the model number in the FIA technical list.

| | |
|---|---|
| FIA Homologation Number<br>ME.005.24 | Capacity<br>6 L |
| Overall Product Height<br>512 ± 5 mm | Cylinder Height<br>430 ± 2 mm |
| Cylinder Diameter<br>162 ± 1 mm | Cylinder Material<br>Steel |
| Pressurising Gas<br>Nitrogen | Extinguishing Agent<br>FX51 |
| Test Pressure<br>36 bar | Working Pressure<br>12 bar |
| Weight (Full)<br>10.63 kg | Weight (Empty)<br>3.61 kg |
| Spray Range<br>2–3 m | Discharge Time<br>55–60 s |
| Temperature Range<br>-15 °C/+80 °C | Warranty<br>6 years – refilled every 2 years |
| Testing standard<br>FIA 8865-2015 | CE<br>CE 0036 |

View product details | Home customer | Business

Technical specifications

# Motorsport · 9 L




To check a homologation, look up the model number in the FIA technical list.

| | |
|---|---|
| FIA Homologation Number<br>ME.006.24 | Capacity<br>9 L |
| Overall Product Height<br>596 ± 5 mm | Cylinder Height<br>490 ± 2 mm |
| Cylinder Diameter<br>184 ± 1 mm | Cylinder Material<br>Steel |
| Pressurising Gas<br>Nitrogen | Extinguishing Agent<br>FX51 |
| Test Pressure<br>36 bar | Working Pressure<br>12 bar |
| Weight (Full)<br>15.28 kg | Weight (Empty)<br>4.75 kg |
| Spray Range<br>2–3 m | Discharge Time<br>100–105 s |
| Temperature Range<br>-15 °C/+80 °C | Warranty<br>6 years – refilled every 2 years |
| Testing standard<br>FIA 8865-2015 | CE<br>CE 0036 |

View product details | Home customer | Business

Technical specifications

# Transport bracket · 2 L



For the red steel extinguisher of the stated size only. Aluminium frame and two quick-release steel straps. Mounting fixings are not included.

| | |
|---|---|
| Product reference | 5-060-638-820-956 |
| Bracket Weight | 250 g |
| Bracket Height | 317 mm |
| Bracket Depth | 120 mm |
| Bracket Width | 110 mm |
| Material | Aluminium |
| Testing standard | NF 074 Rev.11 |

View product details | Home customer | Business

Technical specifications

# Transport bracket · 6 L



For the red steel extinguisher of the stated size only. Aluminium frame and two quick-release steel straps. Mounting fixings are not included.

| | |
|---|---|
| Product reference | 5-060-638-820-970 |
| Bracket Weight | 355 g |
| Bracket Height | 430 mm |
| Bracket Depth | 170 mm |
| Bracket Width | 162 mm |
| Material | Aluminium |
| Testing standard | NF 074 Rev.11 |

View product details | Home customer | Business

Technical specifications

# Transport bracket · 9 L



For the red steel extinguisher of the stated size only. Aluminium frame and two quick-release steel straps. Mounting fixings are not included.

| | |
|---|---|
| Product reference | Bracket Weight |
| 5-060-638-820-987 | 394 g |
| Bracket Height | Bracket Depth |
| 500 mm | 190 mm |
| Bracket Width | Material |
| 184 mm | Aluminium |
| Testing standard | |
| NF 074 Rev.11 | |

View product details | Home customer | Business

Technical specifications

# Modular stand



Non-slip floor base for 2, 6 and 9 L extinguishers. Join units with the two connectors supplied.

| | |
|---|---|
| Product reference | Total Weight |
| 5-060-638-820-772 | 1.4 kg |
| Overall Dimensions | Material |
| 295 × 270 × 665 mm | Polypropylene |

View product details | Home customer | Business

Technical specifications

# Photoluminescent sign







PVC sign that glows in the dark after exposure to light. Available in several languages.

| | |
|---|---|
| Material | Shape |
| PVC | Rectangular |
| Item Package Quantity | Item Dimensions |
| 1 | 150 × 100 × 1 mm |
| Item Weight | Hanging Method |
| 30 g | Hanging Strips (Not Included) |

View product details | Home customer | Business

Technical specifications

# Standard sign




White PVC sign for marking a fire point.
Available in several languages.

| | |
|---|---|
| Material | Shape |
| PVC | Rectangular |
| Item Package Quantity | Item Dimensions |
| 1 | 150 × 100 × 1 mm |
| Item Weight | Hanging Method |
| 20 g | Hanging Strips (Not Included) |

View product details | Home customer | Business

B2B / EXPORT

# Destination labels

Wholesale customers can request supplementary labels for a destination. Specify the delivery country, languages, products, quantities and local requirements. Content, size and placement are agreed before printing. The original technical markings remain visible.




France · FR




Slovensko · SK




Česko · CS




International · EN

Design previews only. Regulatory approval is required before use.

**Request labels with a wholesale order**



# Become a partner

Tell us your territory, the references you need and your estimated quantities.

## Private label

For private label, specify label languages, product range and quantities.

## Distribution · B2B and B2C resellers

For distribution or resale, tell us your business or consumer channels and delivery territory.

**B2B**

**Become a partner**

**B2C**

**office@firetechsolutions.net**

Digital product illustrations. Finishes and proportions may vary.